

2406 – Permanent, High Performance, Oil Free, Pressure Sensitive Adhesive

Specifications:

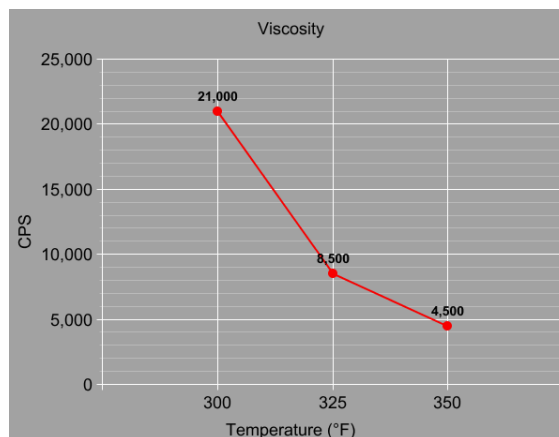
Application	<ul style="list-style-type: none">• General purpose labeling and bonding• Security bag closure• Permanent bonding
Benefits	<ul style="list-style-type: none">• Compatible with thermo-chromatic ink• Good heat resistance• Easy to apply• Oil free
Adhesive	Rubber
Peel Adhesion	8 lbs/in (180° Peel) 5.5 lbs/in ² (Loop Tack)
F.D.A. Status	Conforms to the composition requirements of Indirect Food Additive Regulation 21 CFR 175.105
S.A.F.T.	165°F (74°C)
Color	3 to 4 (Gardner Scale)
Form	1lb mini pillow, 5 lb safe-melt, 55 gallon drum

Viscosity (CPS):

21000 @ 300°F (149°C)

8500 @ 325°F (163°C)

4500 @ 350°F (177°C)

**Note:**

All statements, technical information and recommendations concerning products sold or samples provided by Polybond Corporation are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All products are sold and samples of products provided with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. Polybond Corporation warrants the products to be free from defects in material and workmanship.